



Encastré LED

KILI 18W 4000K 1620lm

18W	4000 KELVIN	1620 LUMEN	V. AC 220-240V 50/60Hz	850°		

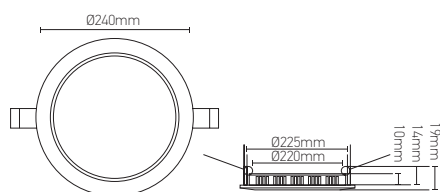


Im. 1620	h(m)	LUX
	1.0m	515.66
	1.5m	229.18
	2.0m	128.92
	2.5m	82.51
	3.0m	57.3

Ref: 164050

EAN	3125461640507
Puissance	18W
Tem pérature de couleur	4000K
Flux lumineux	1620lm
Driver	BK-PDL022-0450 Entrée 220-240V 80mA 50/60Hz Sortie 27-42V 450mA Ta: 45°C Tc: 80°C
mA	↻ 80mA ↻ 450mA
Angle de diffusion	120°
Température de fonctionnement	-20°C ~ 40°C
Marque des LED	EPISTAR 96pcs
Indice de protection	20
Durée de vie	50 000H
IRC	≥80
PF	≥0.9
UGR	<21
Matériau	Aluminium avec un revêtement anticorrosion
Diffuseur	PS (Matt)
Couleur	Blanc (RAL9016)
Poids	1.0kg
Encastrement	Ø225mm
Dimensions	240 x 19mm

• Autres coloris sur demande



Notes

 47, rue des Tournelles, 75 003 Paris.
Tél. +33 (0)1 44 59 22 20

 Chemin du Joran 10, 1260 Nyon.
Tél. +41 (0)22 369 95 00

 Neustrasse 26, D-54413 Grimburg.
Tel. +49 681 969 890 10

 U13 Bentley Court, Finedon Road Ind. Est. Wellingborough,
Northamptonshire, NN8 4BQ | Tel. + 44 (0)1933 770 550

 Girard Sudron Belgique SARL. Rue Van Eyck, 22
B1000 - Bruxelles, BELGIQUE

 Lighting Difusion Italia srl Via Savonarola, 217,
35137 Padova. Tel. +39 391 4018609